

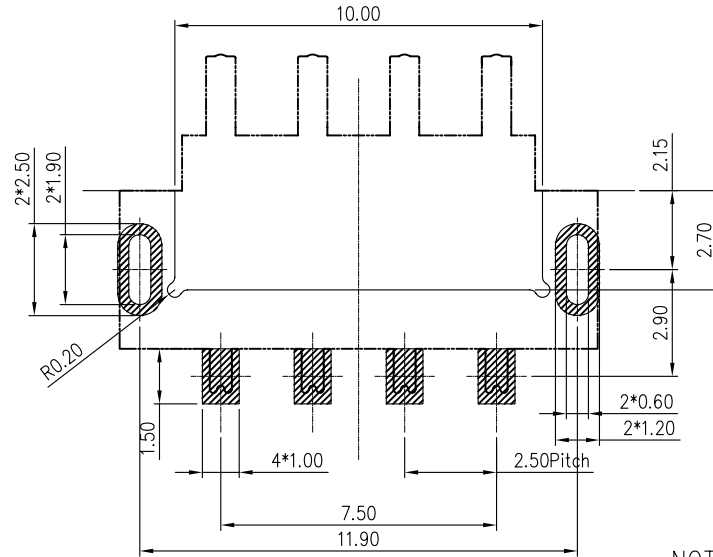
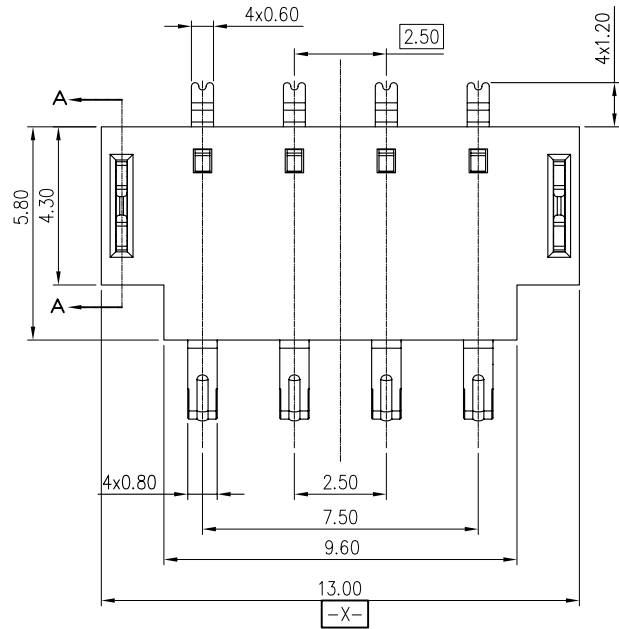
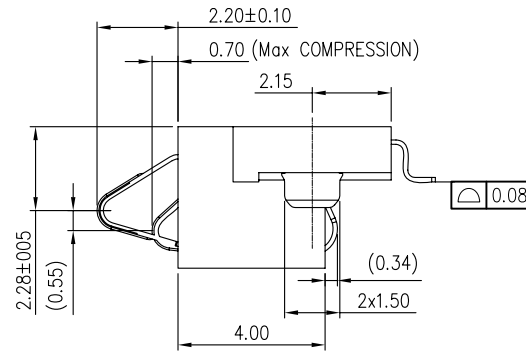


RoHS

REV.	EC# No.	DESCRIPTION	DATE
A	ECR1509046	INITIAL RELEASE.	20150926

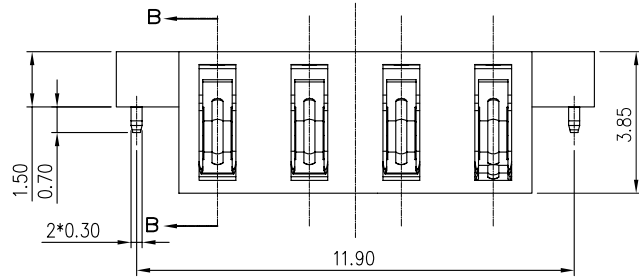

RECOMMENDED PCB LAYOUT  
TOLERANCE(.XX±0.05)

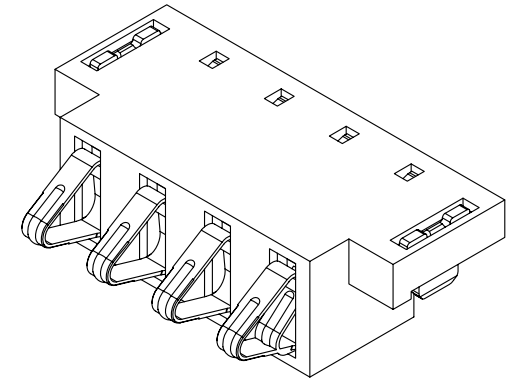

NOTES:

1. MATERIAL:
  - 1.1 Housing: High Temperature Thermoplastic UL94V-0; Color Black.
  - 1.2 Terminal: Copper Alloy.
  - 1.3 LATCH: Stainless Steel.
2. SPECIALITY:
  - 2.1 Rated current: 2.0A
  - 2.2 Rated voltage: 30V
  - 2.3 Contact Resistance: 50mΩ MAX
  - 2.4 Insulation Resistance: 1000MΩ MIN 500V DC
  - 2.5 Dielectric withstanding voltage: 500V AC.
  - 2.6 Solder ability: 255±5s, 5±0.5s.
  - 2.7 Durability: 5000 Cycles Min.
  - 2.8 Operating condition: Temperature: -40v~+85v; Humidity: 80% R.H MAX

MEASURE POINT: (QP)  
QUADRANT POINT (TP)  
TANGENCY POINT (IP)



UNLESS OTHERWISE SPECIFIED, TOLERANCE:  
X. ±0.25  
X.x ±0.20  
X.xx ±0.15  
ANGULAR ±3°

DESING	Jeff	DATE	2015.10.12	TITLE:					
CHECKED	Jeff	DATE	2015.10.12	4 PIN BATTERY 2.50MM PITCH H1.50MM					
APPROVED	Junly	DATE	2015.10.12						
PART NO:	BA150-P0405A			REV:	A	SCALE:	1:1	UNIT:	mm
DRAWING NO:	BA150-P0405A			SIZE:	A4	SHEET:	1/2		

1 2 3 4 5 6 7


A

B

C


D

E

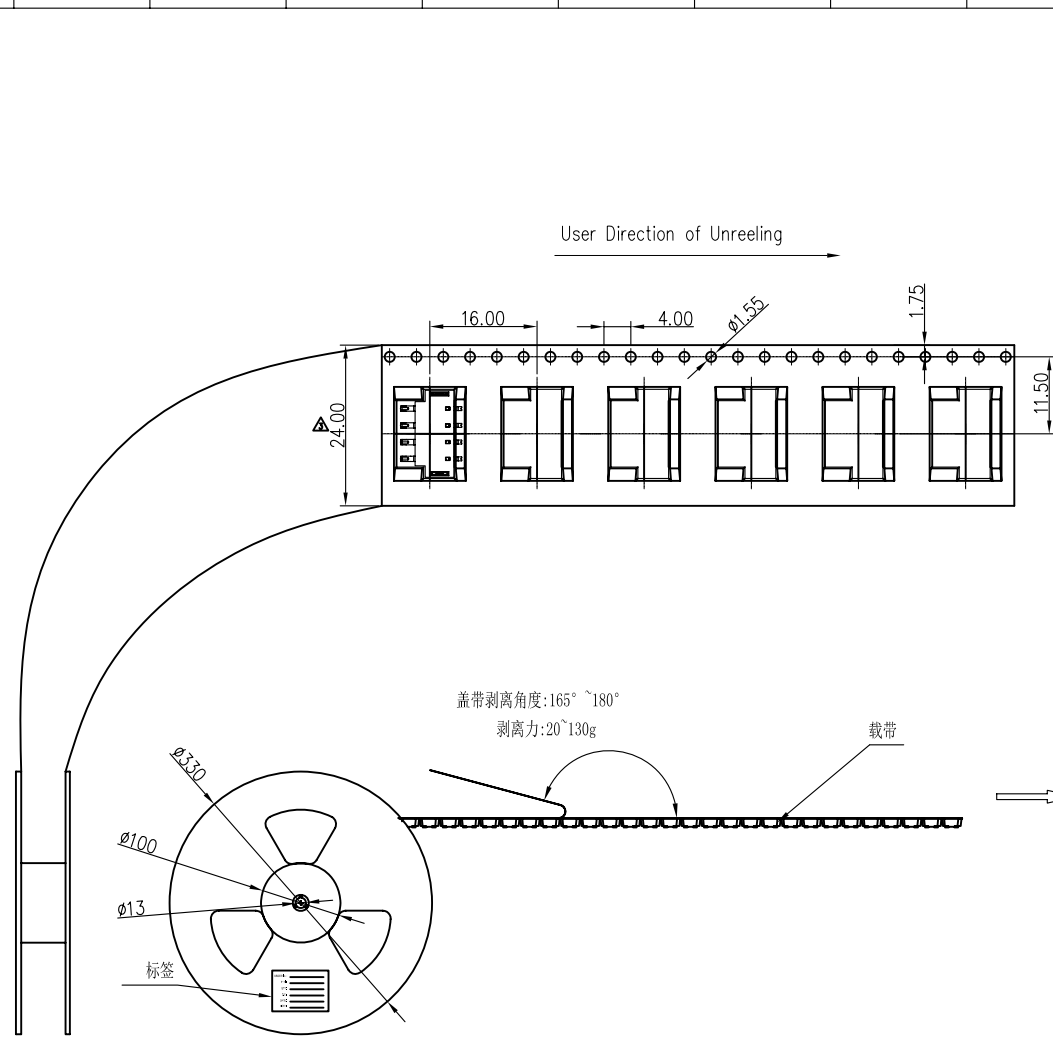

NOTES

1. NUMBER OF CONNECTORS: 1000PCS/REEL
2. LEAD TAPE LENGTH
3. QUANTITY: 8000PCS/CARTON
4. WEIGHT :  
 4.1 NET WEIGHT : 3.46Kg  
 4.2 GROSS WEIGHT : 5.35Kg

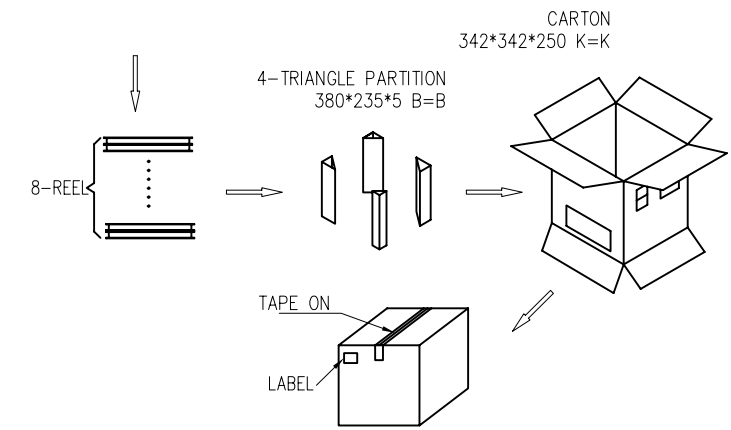

MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)					
	UNLESS OTHERWISE SPECIFIED, TOLERANCE:		TITLE:		
X	±0.25	DESING	Jeff	DATE	2015.10.12
X.x	±0.20	CHECKED	Jeff	DATE	2015.10.12
X.xx	±0.15	APPROVED	Junly	DATE	2015.10.12
ANGULAR	±3°	PART NO: BA150-P0405A		REV: A	SCALE: 1:1
		DRAWING NO: BA150-P0405A		UNIT: mm	
				SIZE: A4	SHEET: 2/2

1 2 3 4 5 6 7