

RoHS

| REV. | LOCAS. | DESCRIPTION | DRAW. | DATE. |
|------|--------|------------------|-------|------------|
| 01 | NEW | INITIAL RELEASE. | Junly | 2011.12.09 |
| | | | | |
| | | | | |



NOTES:

1. MATERIAL:

- 1.1 Plunger: Brass C3604
- 1.2 Barrel: Brass C3604
- 1.3 Spring: SUS 304

2. SPECIALITY:

- 2.1 Rated current: 2.0 Amps
- 2.2 Rated voltage: 12VAC (rms) /DC
- 2.3 Contact Resistance: 50Milliohms Max.
- 2.4 Insulation Resistance: 100 Megohms Min.
- 2.5 Dielectric withstanding voltage: 100V AC.
- 2.6 Durability: 20000 Times.
- 2.7 Operating condition: Temperature -20°C ~ +70°C;
- 2.8 Spring force: 120g ± 20gkf
- 2.9 Full stroke: 1.3 mm

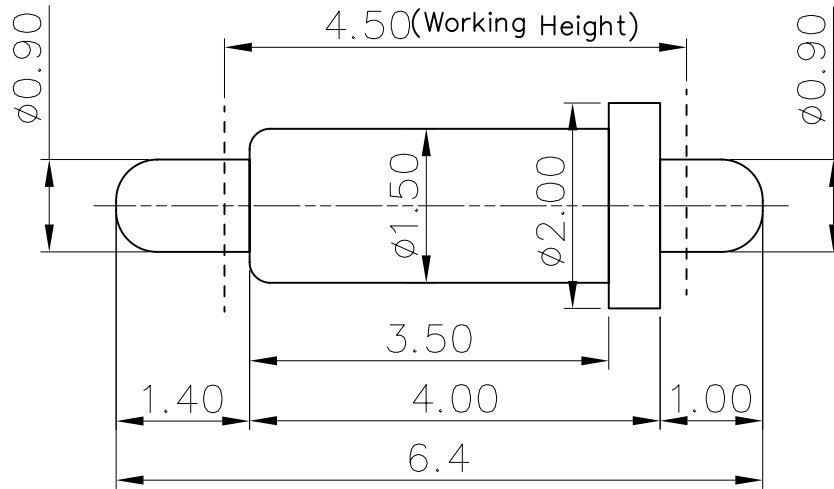

Ordering Code

P A 01 15 064 - 1 2 02 - A

- ① POGO PIN SERIES
- ② FINISHED PRODUCT
- ③ PIN NO. 01 PIN
- ④ 15 $\phi=1.50\text{mm}$
- ⑤ 064: LENGTH 6.40mm
- ⑥ PLATING NUMBER:
- ⑦ WITHOUT POST
- ⑧ $\phi 1.50\text{mm}$ TYPE
- ⑨ RUNNING NUMBER:

| | | |
|--|---|--|
| MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP) | JTS <i>JITS</i> TECHNOLOGY CO., LIMITED | |
| UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.25 X.x ±0.20 X.xx ±0.15 ANGULAR ±3' | DESING Steven DATE 2011.12.09 CHECKED Jeff DATE 2011.12.09 APPROVED Junly DATE 2011.12.09 | TITLE: POGO PIN CONN $\phi=1.50\text{mm}$ L=6.40mm |
| | PART NO: PA0115064-1202-A | REV: 01 SCALE: 12:1 UNIT: mm |
| | DRAWING NO: PA01150640101 | SIZE: A4 SHEET: 1/2 |