

RoHS

REV.	LOCAS.	DESCRIPTION	DRAW.	DATE.
01	NEW	INITIAL RELEASE.	Junly	2011.12.09

NOTES:

1. MATERIAL:

- 1.1 Plunger: Brass C3604
- 1.2 Barrel: Brass C3604
- 1.3 Spring: SUS 304

2. SPECIALITY:



- 2.1 Rated current: 2.0 Amps
- 2.2 Rated voltage: 12VAC (rms) /DC
- 2.3 Contact Resistance: 50Milliohms Max.
- 2.4 Insulation Resistance: 100 Megohms Min.
- 2.5 Dielectric withstanding voltage: 100V AC.
- 2.6 Durability: 20000 Times.
- 2.7 Operating condition: Temperature -20°C ~ +70°C;
- 2.8 Spring force: 120g ± 20gkf
- 2.9 Full stroke: 1.3 mm

Ordering Code

P A 01 15 075 - 1 2 02 - A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① POGO PIN SERIES
- ② FINISHED PRODUCT
- ③ PIN NO. 01 PIN
- ④ 15 $\phi=1.50$ mm
- ⑤ 075: LENGTH 7.50mm
- ⑥ PLATING NUMBER:
- ⑦ WITHOUT POST
- ⑧ $\phi 1.50$ mm TYPE
- ⑨ RUNNING NUMBER:

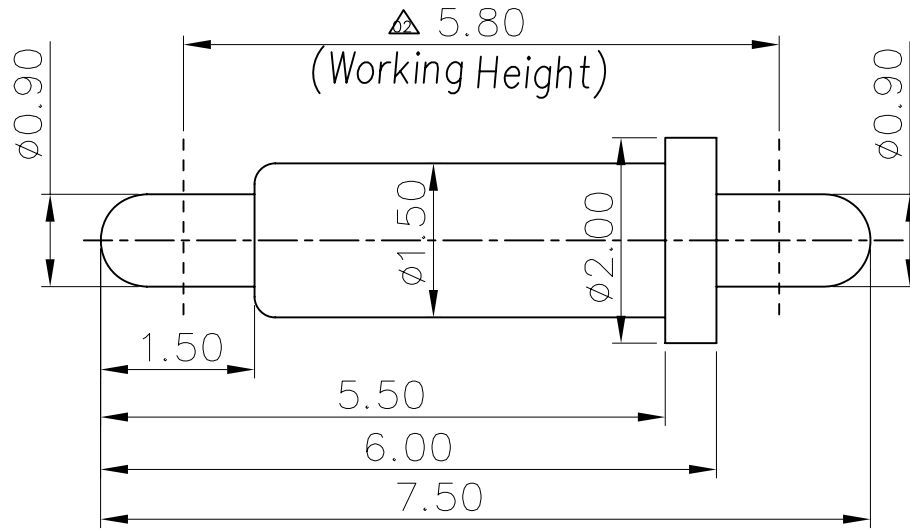

MEASURE POINT: (QP)
 QUADRANT POINT (QP)
 TANGENCY POINT (TP)
 INTERSECTION POINT (IP)



UNLESS OTHERWISE SPECIFIED, TOLERANCE:
 X. ± 0.25
 X.x ± 0.20
 X.xx ± 0.15
 ANGULAR $\pm 3'$

DESING	Steven	DATE	2011.12.09	TITLE:	POGO PIN CONN SINGLE PIN TYPE $\phi=1.50$ mm L=7.50mm				
CHECKED	Jeff	DATE	2011.12.09	REV:	01	SCALE:	12:1	UNIT:	mm
APPROVED	Junly	DATE	2011.12.09	PART NO:	PA0115075-1202-A				
DRAWING NO: PA01150750101				SIZE:	A4	SHEET:	1/2		