
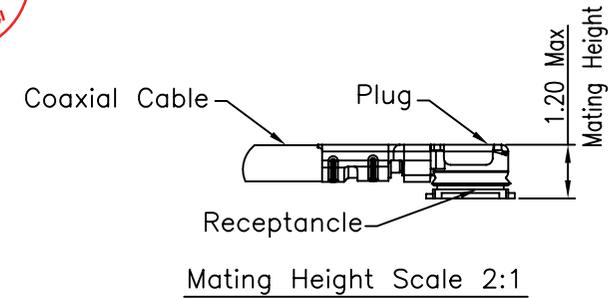


RoHS

REV.	LOCAS.	DESCRIPTION	DRAW.	DATE.
01	NEW	INITIAL RELEASE.	Junly	2016.03.07

受控文件  
 2016.03.07  
 文控中心

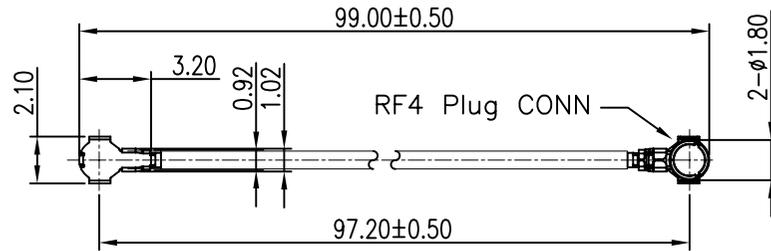


**NOTES:**

1. Material: See Table;
2. Contact Resistance: 20mOHM Max;
3. Dielectric Withstanding Voltage: 100V AC For 1 Minute;
4. Insulation Resistance: 1000M OHM Min;
5. Frequency Range: DC up to 6GHz  
 VSWR: 1.3 Max. at 0~3GHz;  
 VSWR: 1.3 Max. at 0~3GHz;
6. Operating Temperature: -40°C to +90°C;


**TABLE:**

4	CABLE	1PC	AWG#36	OD0.81mm,COLOR BLACK
3	CONTACT	1PC	PHOSPHOR BRONZE	GOLD PLATED OVERALL 50u"Ni PLATED OVER
2	SHELL	1PC	PHOSPHOR BRONZE	
1	Housing	1PC	PC/ABS	COLOR BLACK,UL94V-0
NO	Description	Dosage	Material	Color/plating

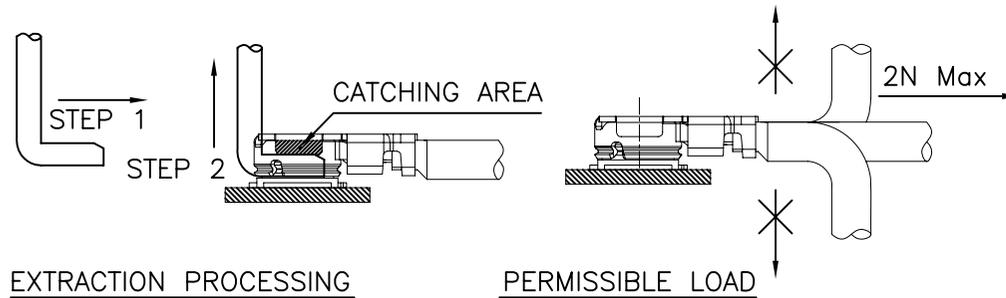

EXTRACTION PROCESSING

PERMISSIBLE LOAD



CONTACTOR SLANT ANGLE

MEASURE POINT:  
 QUADRANT POINT (QP)  
 TANGENCY POINT (TP)  
 INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:  
 X. ±0.25  
 X.x ±0.20  
 X.xx ±0.15  
 ANGULAR ±3'

JTS

JITS TECHNOLOGY CO., LIMITED

DESING	Jeff.Zhao	DATE	2016.03.07	TITLE:			
CHECKED		DATE		RF 4 CABLE L=99MM			
APPROVED		DATE					
PART NO:	WD-00099	REV:	01	SCALE:	Free	UNIT:	mm
DRAWING NO:	WD-00099	SIZE:	A4	SHEET:	1/1		