


REV.	LOCAS.	DESCRIPTION	DRAW.	DATE.
5		ADD DIMLINEAR&"XX"	Teddy	2015/06/15
6	—	Update the drawing frame	Teddy	2016/01/13

NOTES:


- MATERIAL:
HOUSING: THERMOPLASTIC,
UL94V-0,COLOR:BLACK
CONTACT: COPPER ALLOY
SHELL: STAINLESS STEEL
- PRODUCT SPECIFICATIONS:
VOLTAGE RATING: 50V
CURRENT RATING: 1.0A
INSULATION RESISTANCE: 1000MEG.OHM MIN
CONTACT RESISTANCE: 100 MILL.OHM MAX
OPERATION TEMPERATURE: -40° TO +85°
DURABILITY: 3000 CYCLES



受控文件
2016.03.08
文控中心

TABLE 1

2	SA130-S06-01B	6 PIN
1	SA130-S08-01A	8 PIN
NO.	PART NO.	DESCRIPTION

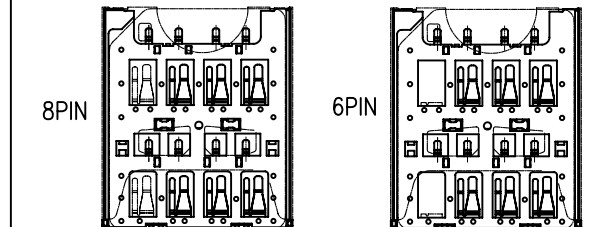

3	SHELL	1PC	SUS304-3/4H	GOLD FLASH PLATING ON SOLDER TAILS GOLD PLATING ON CONTACT AREA
2	CONTACT	1Set	C5210R-EH	GOLD FLASH PLATING ON SOLDER TAILS 60u" MIN. NICKEL UNDERPLATING OVER ALL
1	HOUSING	1PC	LCP/BLACK	THERMOPLASTIC,UL94V-0,COLOR:BLACK
NO	Description	Dosage	Material	Color/plating

MEASURE POINT:


QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:

X. iA0.25
X.x iA0.20
X.xx iA0.15
ANGULAR iA3id

JITS TECHNOLOGY CO., LIMITED

DESING	DATE	TITLE:
CHECKED	DATE	MICRO SIM CARD CONN
APPROVED	DATE	I/M TYPE H1.30MM
PART NO:	SEE TABLE 1	REV: 6
DRAWING NO:	SA130-S08-01A	SCALE: 1:1
		UNIT: mm
		SHEET: 1/2

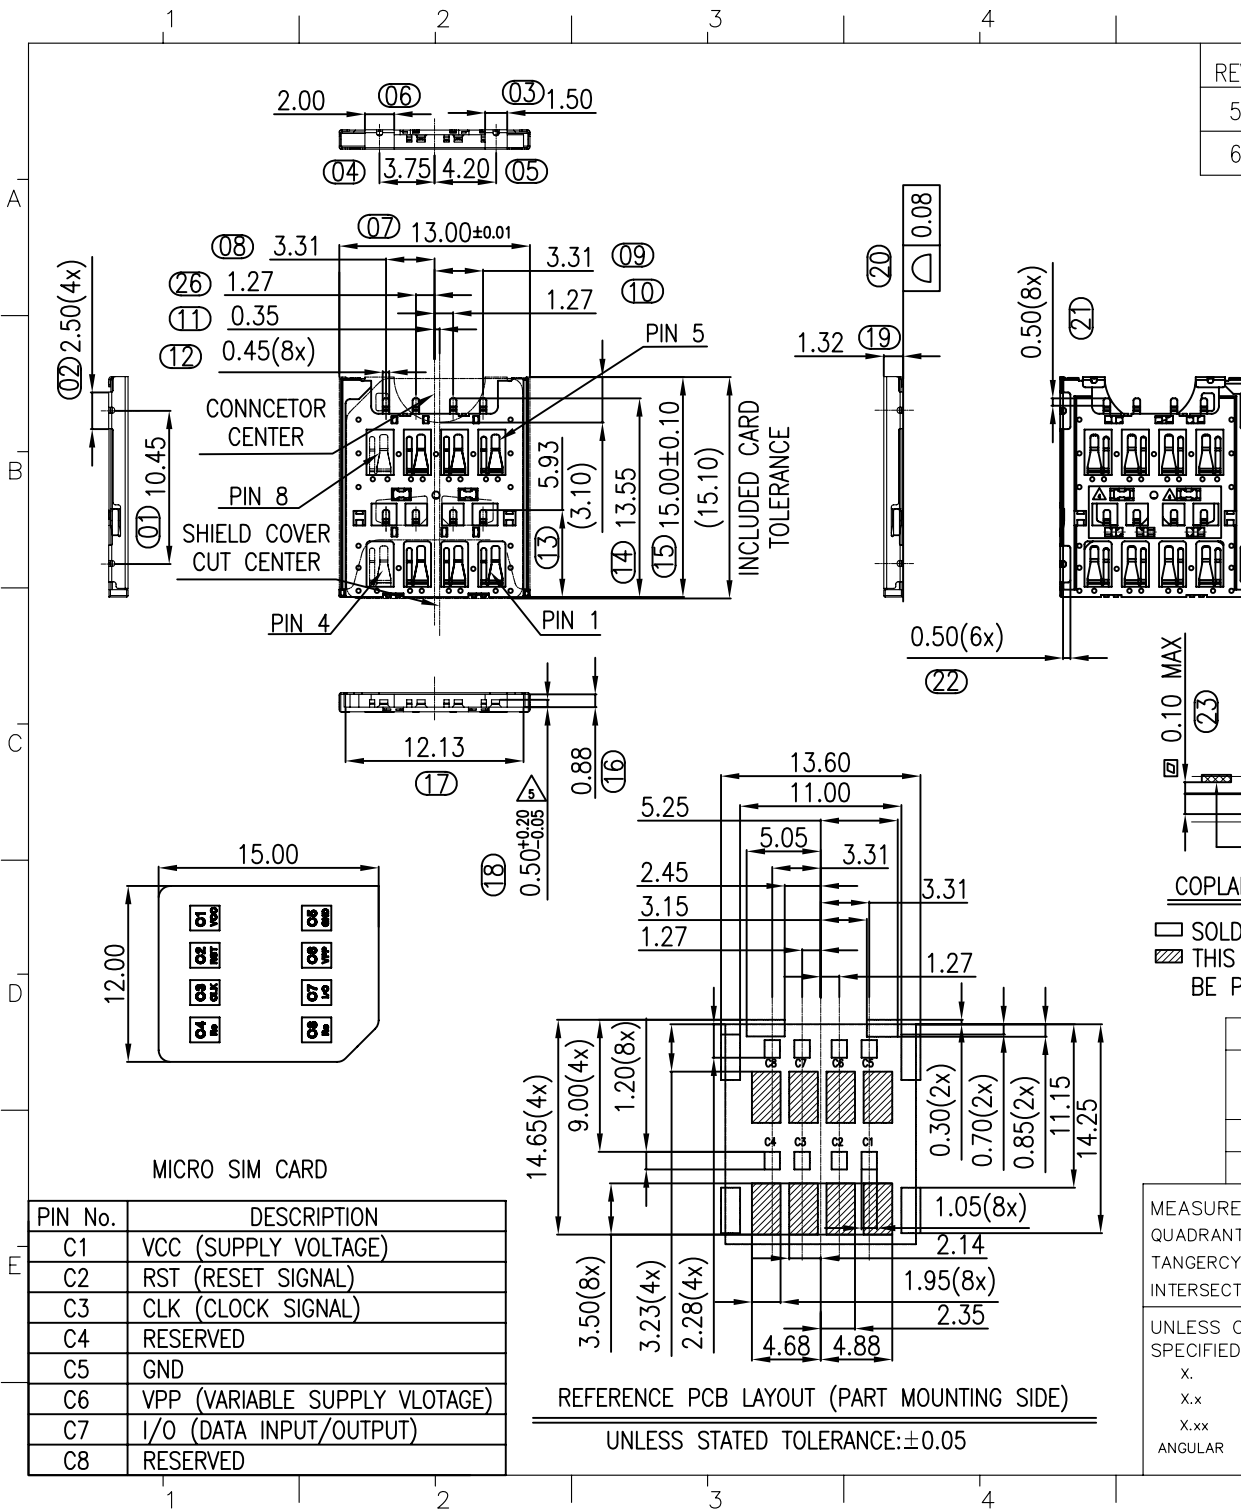

REFERENCE PCB LAYOUT (PART MOUNTING SIDE)

UNLESS STATED TOLERANCE:±0.05

PIN No.	DESCRIPTION
C1	VCC (SUPPLY VOLTAGE)
C2	RST (RESET SIGNAL)
C3	CLK (CLOCK SIGNAL)
C4	RESERVED
C5	GND
C6	VPP (VARIABLE SUPPLY VOLTAGE)
C7	I/O (DATA INPUT/OUTPUT)
C8	RESERVED

